


PLUMBING KEY NOTES:

NOTE: ALL KEYNOTES MAY NOT BE USED ON THIS SHEET.

- 1
- PIPING UP.
- 2
- PIPING DOWN.
- 3
- PIPING UP AND DOWN.
- 4
- VENT PIPING THROUGH ROOF. TERMINATION POINT OF VENT PIPE ABOVE ROOF SHALL BE A MINIMUM OF 10' AWAY FROM ANY AND ALL AIR INTAKES.
- 5
- PIPING ROUTED BENEATH FLOOR.
- 6
- PIPING TO / FROM BENEATH FLOOR TO / FROM ABOVE CEILING.
- 7
- ROUTE WATER HEATER CONDENSATE TO NEARBY MOP SINK OR FLOOR DRAIN. TERMINATE WITH INDIRECT CONNECTION.
- 8
- INSTALL WATER HEATER IN ACCESSIBLE LOCATION ABOVE CEILING.
- 9
- PROVIDE HOT WATER RECIRCULATION PUMP. REFER TO PLUMBING DETAILS FOR INSTALLATION REQUIREMENTS.
- 10
- PROVIDE ISLAND VENT FOR PLUMBING FIXTURE AT ISLAND. REFER TO PLUMBING DETAILS FOR INSTALLATION REQUIREMENTS.

RE: PLBG FIXTURE SCHEDULE FOR PIPE SIZES AT EACH INDIVIDUAL FIXTURE

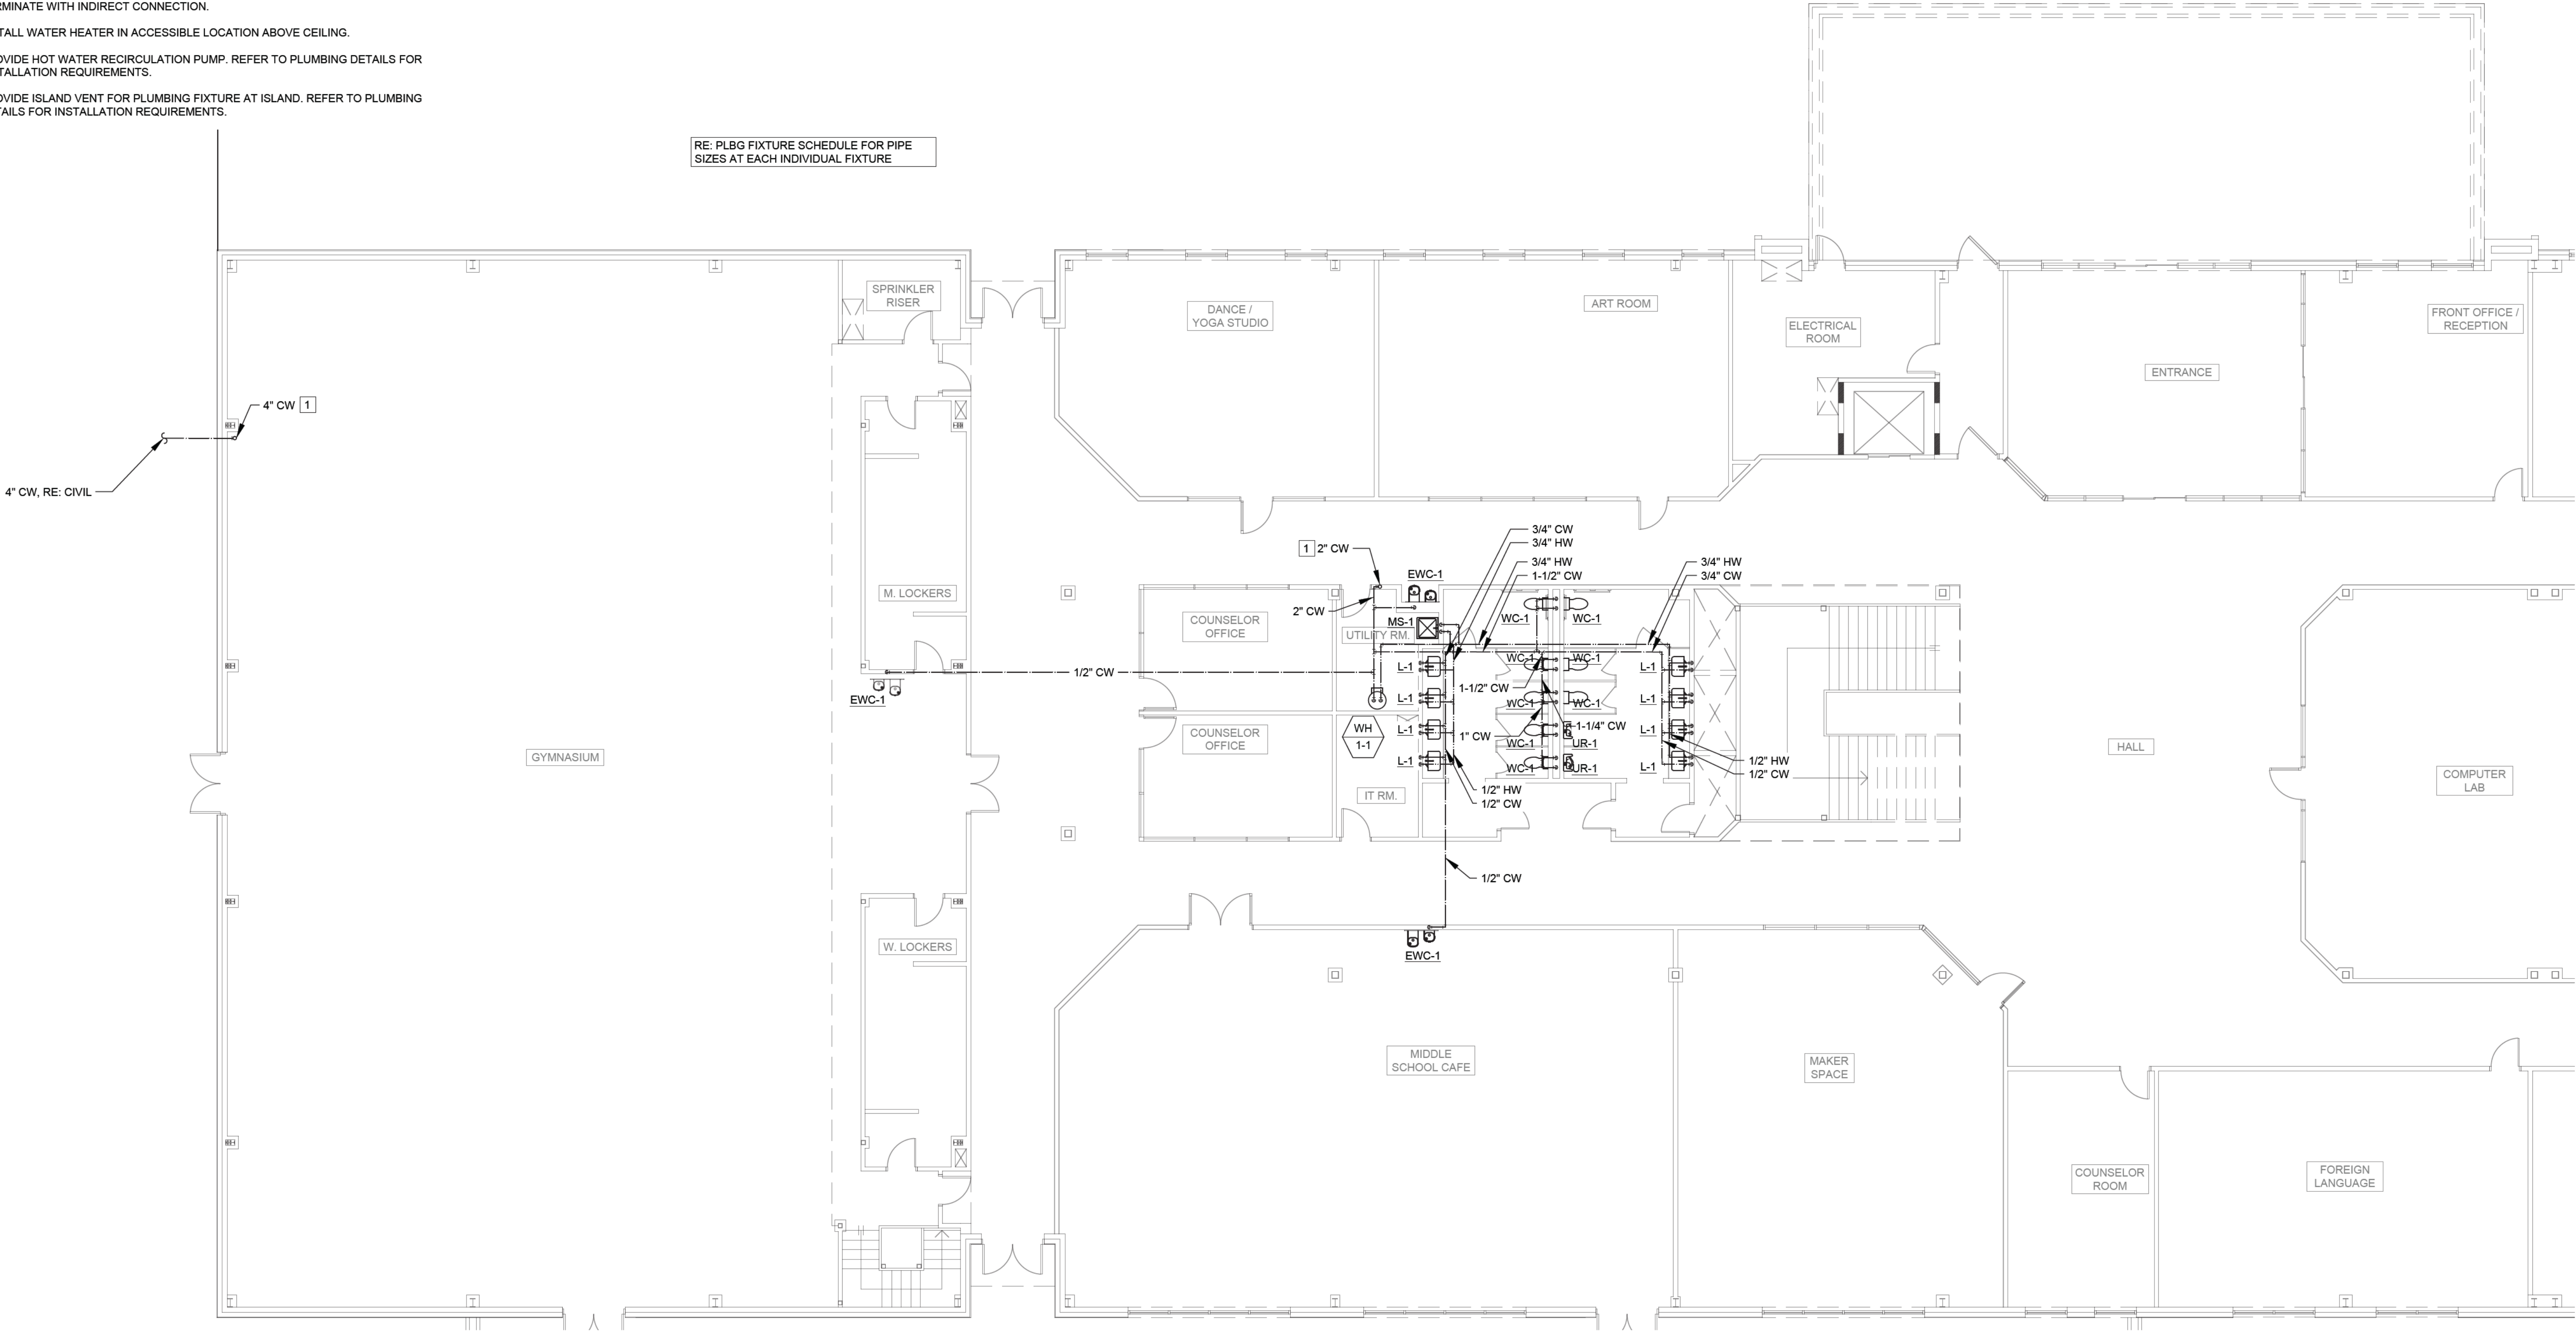

1 DOMESTIC WATER 1ST FLOOR PLAN - PARTIAL A
1/8" = 1'0"



No.	DATE	DESCRIPTION
1	02/05/24	ISSUE FOR PERMIT
2	REV_DATE	
3	REV_DATE	
4	REV_DATE	
5	REV_DATE	